




SERIES

SS

**STAINLESS STEEL
WORM GEAR SPEED REDUCERS**

■ Stainless steel Worm Gear Speed Reducers

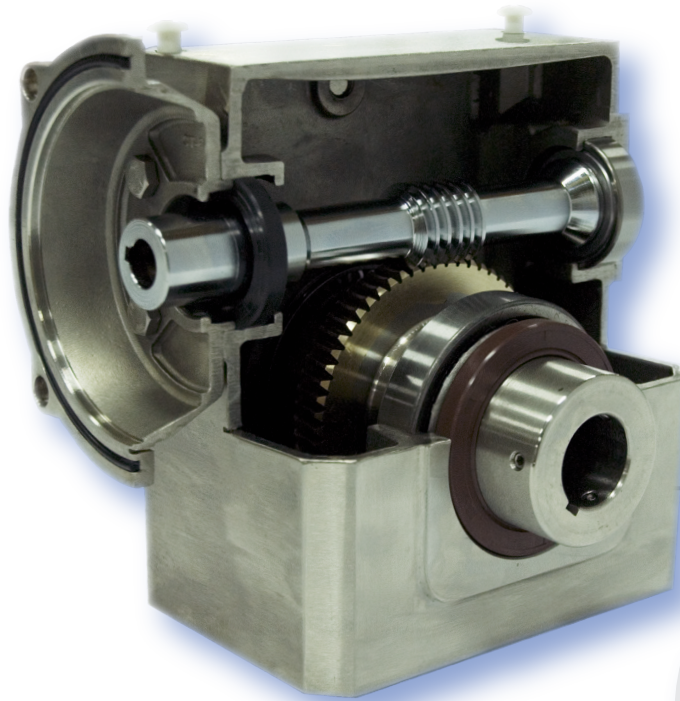

- 1.Stainless steel material for housing,covers and flange to endure tough environments and elimination rusting and peeling.
- 2.Polished and smooth surface for reducing germs bred.
- 3.Stainless steel output shaft resists corrosion from moisture.
- 4.O-ring on input flange decreases access of fluids.
- 5.Pressure decrease chamber design for free vent installed.
- 6.Viton seals offer superior performance in hot/harsh environment.
- 7.USDA H1 food grade lubricant: MOBIL SHC CIBUS 460.

Ex 範例 : SHM 206 60 56C A

SHM - Stainless flange . Hollow output shaft

SSM - Stainless flange. Solid output shaft


S — **H** — **M**

206 - Center distance. 206 / 237 / 262 / 325

60 - Ratio. 5 / 10 / 15 / 20 / 30 / 40 / 50 / 60

56C - NEMA 56C frame

A - Assembly of shaft position.

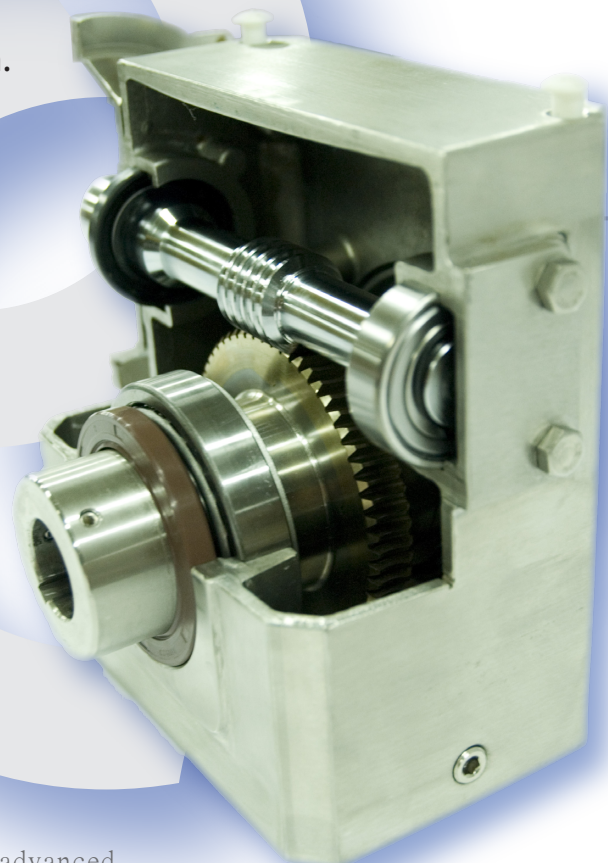

We offer various gear speed reducers with advanced capabilities which are equivalent to International specifications. Please contact us to get more information.

Class I Service Factor 1.0

RATIO	Output RPM	Input Horse Power @ 1750 RPM						
		1/4	1/3	1/2	3/4	1	1-1/2	2
5	350	206	206	206	206	206	206	206
10	175	206	206	206	206	206	206	206
15	117	206	206	206	206	206	206	237
20	88	206	206	206	206	206	237	262
30	58	206	206	206	206	237	262	325
40	44	206	206	206	206	237	325	325
50	35	206	206	206	237	262	325	325
60	29	206	206	206	237	262	325	

Class II Service Factor 1.25


RATIO	Output RPM	Input Horse Power @ 1750 RPM						
		1/4	1/3	1/2	3/4	1	1-1/2	2
5	350	206	206	206	206	206	206	206
10	175	206	206	206	206	206	206	237
15	117	206	206	206	206	206	237	262
20	88	206	206	206	206	206	262	325
30	58	206	206	206	206	237	325	325
40	44	206	206	206	237	262	325	
50	35	206	206	206	237	325	325	
60	29	206	206	206	262	325	325	

Class III Service Factor 1.75






RATIO	Output RPM	Input Horse Power @ 1750 RPM						
		1/4	1/3	1/2	3/4	1	1-1/2	2
5	350	206	206	206	206	206	206	237
10	175	206	206	206	206	206	237	262
15	117	206	206	206	206	237	262	325
20	88	206	206	206	237	262	325	325
30	58	206	206	206	237	325	325	
40	44	206	206	237	262	325		
50	35	206	206	237	325	325		
60	29	206	206	237	325	325		

DIMENSIONS


SHM

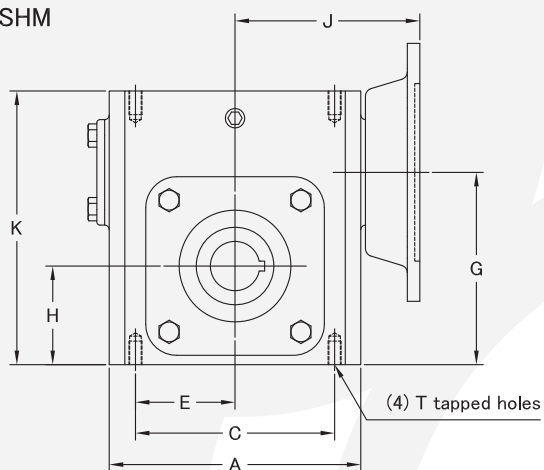

SSM

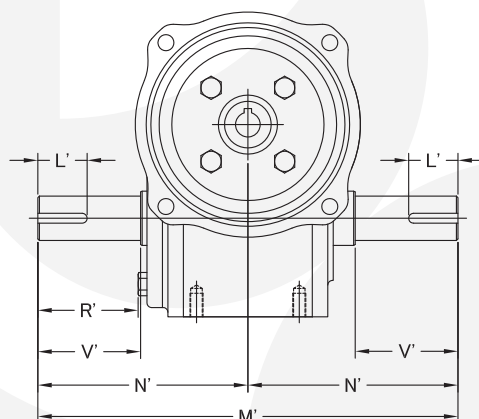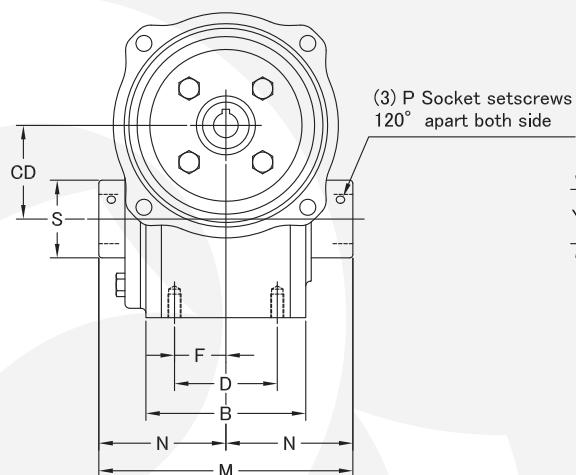

ASSEMBLY OF SHAFT POSITION

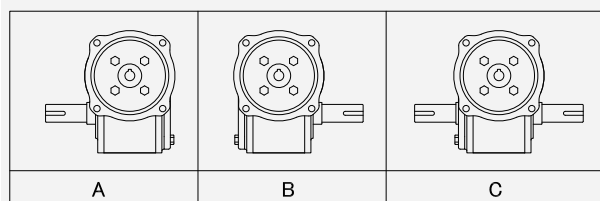

SIZE	Shared											
	A	B	C	CD	D	E	F	G	H	J	K	T
206	5.7	3.82	5	2.062	2.88	2.5	1.44	4.34	2.28	4.37	6.38	3/8-16UNC
237	6.38	4.06	5	2.375	2.88	2.5	1.44	4.88	2.5	4.69	6.94	3/8-16UNC
262	7.17	4.69	6.38	2.625	3.38	3.19	1.69	5.56	2.94	5.06	8	3/8-16UNC
325	9.02	5.75	7.5	3.25	4	3.75	2	6.75	3.5	6.06	9.38	7/16-14UNC

(Unit / inch)

SIZE	Hollow Output Shaft							Solid Output Shaft							
	M	N	P	S	U	W	Y	L'	M'	N'	R'	U'	V'	W'	Y'
206	6.44	3.22	1/4-28UNF	1.77	1.13 1.25	0.25 0.25	1.25 1.38	1.25	9.38	4.69	2.19	1	2.09	0.25	1.11
237	6.44	3.22	1/4-28UNF	1.97	1.25	0.25	1.38	1.25	10.18	5.09	2.31	1.13	2.37	0.25	1.24
262	7	3.5	1/4-28UNF	2.36	1.25 1.44	0.25 0.38	1.38 1.62	2	11.26	5.63	2.56	1.13	2.63	0.25	1.24
325	8.76	4.38	5/16-24UNF	2.76	1.25 1.94	0.25 0.5	1.38 2.13	2.44	14.12	7.06	3.22	1.375	3.25	0.31	1.51

總公司 Head Office / Plant

成大精機工業股份有限公司

台灣 高雄市 仁武區 後庄巷118號

電話: 886-7-3727007 (代表號)

傳真: 886-7-3727267

電子信箱: sales@chenta.com

網站: <http://www.chenta.com>

中國分公司 Suzhou Plant

成奕精機（蘇州）有限公司

江蘇省 蘇州市 相城區

漕湖大道89號

電話: 86-512-6586 5367

傳真: 86-512-6986 5366

電子信箱: cysd@chenta.com

Headquarter:

CHENTA PRECISION MACHINERY INDUSTRIAL INC.

118 Hall Tran Lane, Jen Wu District, Kaohsiung City, Taiwan

Tel: 886-7-3727007(Rep.)

Fax: 886-7-3727267

email: sales@chenta.com

web: <http://www.chenta.com>

CHENTA USA:

GearKing, Inc.


26241 Enterprise Ct.

Lake Forest, CA 92630, USA

Tel: (949)579-2789

Fax: (949)206-0868


Email: usa@chenta.com



CHENTA PRECISION MACHINERY IND. INC.

經銷商

我們生產的減速機機種款型豐富，規格與國際同步接軌，性能優越，歡迎聯繫索取型錄。



2013.3

成大齒輪
CHENTA GEAR

SERIES
SS
STAINLESS STEEL WORM GEAR SPEED REDUCERS